



LEDGER LOCKS
SEE SECTION R502.2.1

FLASHING:
STUCCO / BRICK:
SEE SECTION 703.4 /
703.12.2

INSTALL LAG SCREWS
THAT PENETRATE 1-1/2"
MINIMUM INTO RIM JOIST
OR WALL STUDS. (3/8"
LAGS EVERY 16" OR
EQUIVALENT) STAGGERED

JOIST HANGER

LEDGER BOARD TO BE
SAME SIZE AS JOISTS.

PROVIDE BLOCKING FOR
1 JOIST INSTALLATIONS

LEDGER DETAIL

INSTALL LAG SCREWS
THAT PENETRATE 1-1/2"
MINIMUM INTO RIM JOIST
OR WALL STUDS. (3/8"
LAGS EVERY 16" OR
EQUIVALENT) STAGGERED


2X2 LEDGER BOARD
FASTENED WITH 16d
NAILS. (3 NAILS FOR
EACH JOIST TO BE
SUPPORTED)

LEDGER BOARD TO BE
LARGER THAN JOISTS.

PROVIDE BLOCKING FOR
1 JOIST INSTALLATIONS

ALTERNATE LEDGER

TABLE 507.9.1.3(2)
PLACEMENT OF LAG SCREWS AND BOLTS IN
DECK LEDGERS AND BAND JOISTS

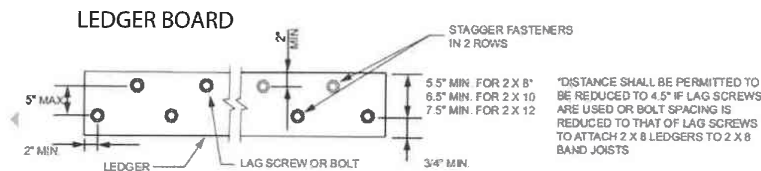

HOUSE CONNECTION